



Slitter Rewinder



PLUTO III



SOMA
CONNECTION



TENZOMAT II
TENSION CONTROL



AUTOMATIC
FEATURES

The PLUTO III Slitter Rewinder with integrated unwind unit offers mid and wide web printers and converters a cost effective solution for slitting a wide range of substrates. High efficiency is achieved through higher operating speeds, rigid construction and automatic knife positioning system usually available on higher level machines.

› Web width	1100 / 1350 / 1600 mm 43.3 / 53.1 / 63"	› Unwind roll diameter	1000 mm 39.4"
› Min. web width	300 mm 11.8"	› Unwind roll weight	1200 kgs 2646 lbs
› Min. slit width	35 mm / 25 mm option 1.4 / 1" option	› Rewind roll diameter	635 mm 25"
› Speed	550 m/min 1804 fpm	› Core diameter	76,2 / 152,4 mm 3 / 6"
› Processed materials	PP, PET, LDPE, HDPE, laminate, paper		



TENZOMAT II
REWINDING
TENSION
CONTROL

08



KNIFE/BLADE
POSITIONING
ASSISTANT

11




AUTOMATIC
KNIFE/BLADE
POSITIONING

01, 12




UNWINDING
TENSION
CONTROL

18




AUTOMATIC
LASER CORE
GUIDING

02



SHAFT-LESS
UNWIND

15




UNLOADING
MECHANISM




ECCENTRIC
ROLLER

09




SIMPLE
STAND



STRIP
HOLDERS

07

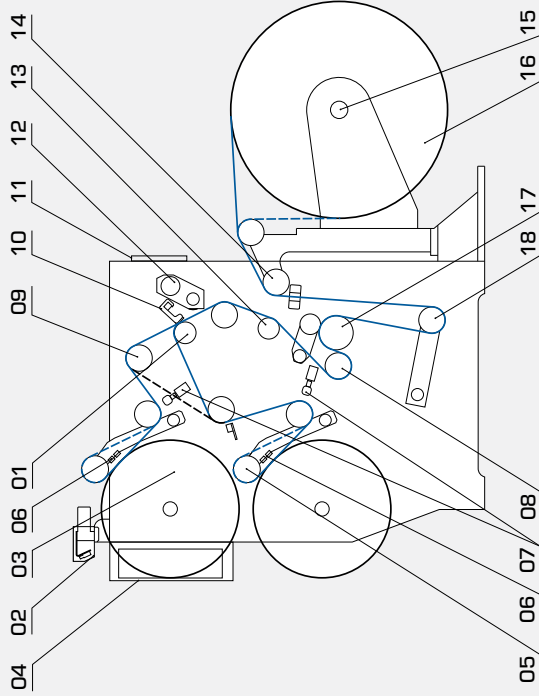

- 01 Female knife shaft
- 02 Laser core guiding (Optional)
- 03 Slit rolls
- 04 Main control panel (Touch screen)

- 05 Lay-on rollers
- 06 Ionisation bars
- 07 Strip holders
- 08 Tensometric roller

- 09 Eccentric roller
- 10 Rod with razor blade holders
- 11 Positioning assistant
- 12 Male knife shaft

- 13 Spreader banana roller
- 14 Adjustable roller
- 15 Shaft-less unwind
- 16 Parent roll

- 17 Main drive roller
- 18 Dancer roller