



Laminator



# LAMIFLEX E



SOMA  
CONNECTION



TENSION  
CONTROL




PRECISE  
LAMINATION

The Lamiflex E solvent free laminator benefits from increased efficiency while maintaining a competitive price advantage. The system offers state of the art laminating technology on a wide range of substrates.

› Web width	850 / 1100 / 1320 / 1500 mm 33.5 / 43.3 / 52 / 59.1"	› Roll weight	1000 kg 2204.6 lbs
› Min web width	300 mm 11.8"	› Inner core diameter	76,2 / 152,4 mm 3 / 6"
› Speed	400 m/min 1312 fpm	› Roll diameter	1000 mm 39.4"
› Rewind tension range	20 N - 400 N	› Unwind tension range	20 N - 500 N
› Processed materials	<b>BOPP, PET, PE, LDPE, PP, AL, foil or paper</b>		

TEMPERATURE CONTROL SYSTEM

04, 06, 08




ROLLER WASH-UP SYSTEM

04, 05, 06




TENSION CONTROL SYSTEM

10

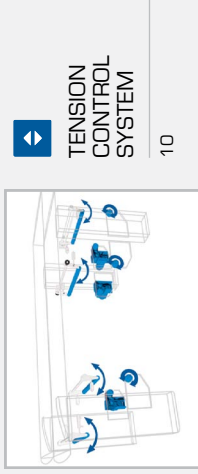

THREE ROLLER LAMINATING UNIT

08, 09



SHAFT-LESS UNWINDS AND REWIND

01, 02, 03



SLEEVED TRANSFER ROLLER

05



FUME EXHAUSTING UNIT




COOLING CYLINDER

13



TOUCH SCREEN

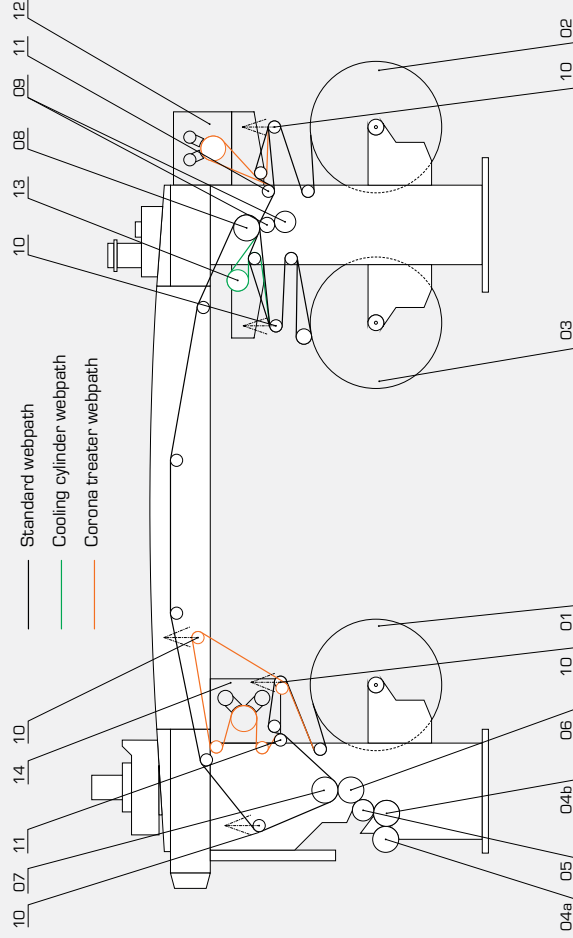

- 01 Primary unwind
- 02 Secondary unwind
- 03 Rewind

- 04 Thermo-controlled rollers
- 05 Transfer sleeved roller
- 06 Applicator thermo-controlled roller

- 07 Lay-on roller
- 08 Lamination thermo-controlled roller
- 09 Lamination double lay-on roller

- 10 Pneumatic dancer rollers
- 11 Adjustable roller
- 12 Secondary corona treater

- 13 Cooling cylinder
- 14 Primary corona treater