

DAIHAN-brand® 4~45°C Personal Low Temperature Incubator “ThermoStable™ DLI-C20”, 20 Lit., Compact Design **NEW** with Digital Micro Processor PID Control, Auto Tuning, Peltier Element Module, 2 Step Operation, 개인용 저온 인큐베이터



20Lit. Personal Low Temperature Incubator “ThermoStable™ DLI-C20”

- Made in Korea
 - PL(Product Liability) Insurance
 - Certificate & Traceability : Controlled by Serial Number, Certificate, Delivery-Information, and Traceable Data Base System.
 - Various Application : Microorganism Cultivation, Bacteriophage In-Vitro Packaging, DNA Ligation, Enzyme Immunoassay, etc.
 - 2-Year Warranty
- * Light & Compact Design : Suitable for Personal Use, Easy to Move
 - * ABS Chamber and Exterior
 - * Micro Processor PID Controller : Precise Temp. Control by 0.1°C, Temperature Uniformity
 - * Auto Tuning : Rapid Response and High Stability according to the Thermal Properties and the Rate of Thermal Response of the Object
 - * Peltier Element Module :
 - Cooling and Heating by using Thermoelectric Semiconductor Element
 - Minimizes Noise (<20dB) and Power Consumption
 - * Safety Device : Over Temperature & Over Current Protection, Sensor Error Detection

Specifications & Ordering Information


| Spec. | Model | “ThermoStable™ DLI-C20” 2-Step Temp. Control at a time |
|------------------------|----------|---|
| Capacity | | 20Lit. |
| Air Flow-type | | Natural-air Type |
| Temp. Range & Accuracy | | 4~45°C (Controlled by 0.1°C), ±0.2°C |
| Temp. Uniformity | | ±0.2°C at 37°C |
| Operation Sound Level | | <20dB |
| Step Operation | | 2-Step, Setting Time 99hours |
| Condensate Drainage | | Natural Evaporation |
| Shelf | | Included 1Ea. ABS shelf, 213×260×8mm |
| Material | | Internal & External : ABS Resin |
| Dimension | Interior | 213×265×360mm |
| | Exterior | 270×330×510mm |
| Weight | | 7kg |
| Power Consumption | | 56W |
| Power Supply | | AC 90V~240V, 50/60Hz |




with ABS Shelf Included

| | | |
|----------------|------|--------------|
| Cat. No. | 230V | DH.Dli0025 |
| | 120V | DH.Dli0025.1 |
| Price, Each. ₩ | | Coming Soon! |

* Other Specifications are available upon Customer's Request.

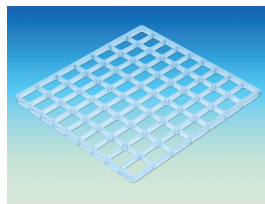

(1) Spare Shelves

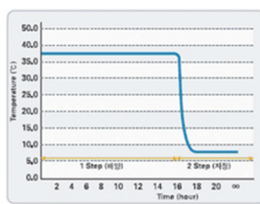

2-Step Temp. Control Graph

Spare Shelves

| | | |
|------------|---|--------------|
| DH.Lis0100 | (1) ABS Shelf, “LIS20”, w213×d260×h8mm, for “DLI-C20” | Ea. Price, ₩ |
|------------|---|--------------|

Optional Digital Shaking Incubator Package with “DLI-C20”

| | |
|--|--------------|
| (2) Orbital Shaking Incubator Package for 230V | Ea. Price, ₩ |
|--|--------------|

| | | |
|-------------|--|--|
| DH.WSO04012 | Shaker Digital Orbital, 230V, SHO-2D | |
| DH.Lic0200 | Connector for Shaking Incubator “LIC20”, for “DLI-C20” | |

| | |
|--|--------------|
| (3) Orbital Shaking Incubator Package for 120V | Ea. Price, ₩ |
|--|--------------|


| | | |
|-------------|---|--|
| DH.WSO05012 | Shaker Digital Orbital, 120V, SHO-2D | |
| DH.Lic0200 | Connector for Shaking Incubator, “LIC20”, for “DLI-C20” | |

| | |
|--|--------------|
| (4) Reciprocating Shaking Incubator Package for 230V | Ea. Price, ₩ |
|--|--------------|

| | | |
|-------------|---|--|
| DH.WSR04022 | Shaker Digital Reciprocating, 230V, SHR-2D | |
| DH.Lic0200 | Connector for Shaking Incubator, “LIC20”, for “DLI-C20” | |

| | |
|--|--------------|
| (5) Reciprocating Shaking Incubator Package for 120V | Ea. Price, ₩ |
|--|--------------|

| | | |
|-------------|---|--|
| DH.WSR05022 | Shaker Digital Reciprocating, 120V, SHR-2D | |
| DH.Lic0200 | Connector for Shaking Incubator, “LIC20”, for “DLI-C20” | |

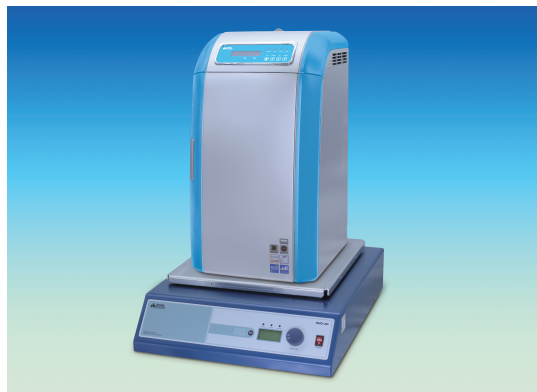

Optional Digital Shaking Incubator Package

※ The Shaker Itself can be used Separately.