


Plan View

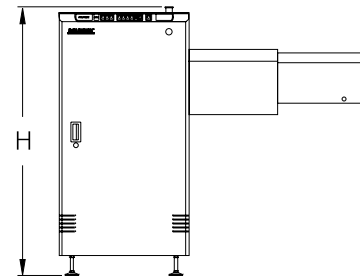

Front View

Legend
△ : Fixed Point

Features

- ❖ User friendly 'soft touch' LED membrane control panel
- ❖ Passage way 'Normally Closed' (745 mm)
- ❖ Swift and smooth retraction/extension of conveyor (frequency inverter controller)
- ❖ Additional built-in buffer zone
- ❖ Safety sensor installed to enhance safety
- ❖ Smooth and parallel width adjustment (leadscrew)
- ❖ SMEMA compatible

SPECIFICATIONS

SPECIFICATIONS	
Description	This unit is used when a passage way is required in a production line (fully automatic).
Cycle Time	Retract: 12 seconds Extend: 12 seconds
Power Source	100, 230VAC 1Ph
Power Consumption	250VA max.
Air Pressure	4 - 6 bar
Air Consumption	16 ltr/min. max.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM3600-M	1500 x 780 x 1330	292 mm	230 kg
L	NTM3600-L	1500 x 930 x 1330	292 mm	250 kg