


Features

- ❖ Applicable to various substrates, leadframes or carriers
- ❖ 'Servo control' lifting motion
- ❖ High speed and precise indexing
- ❖ Machine size depends on the type of magazine used
- ❖ Stores up to 10 different types of magazine dimensions
- ❖ Stainless steel magazine guide
- ❖ Pneumatic pusher's pressure regulated
- ❖ Easy loading or unloading of magazines
- ❖ User friendly touch screen panel
- ❖ SMEMA compatible



Legend
 △ : Fixed Point

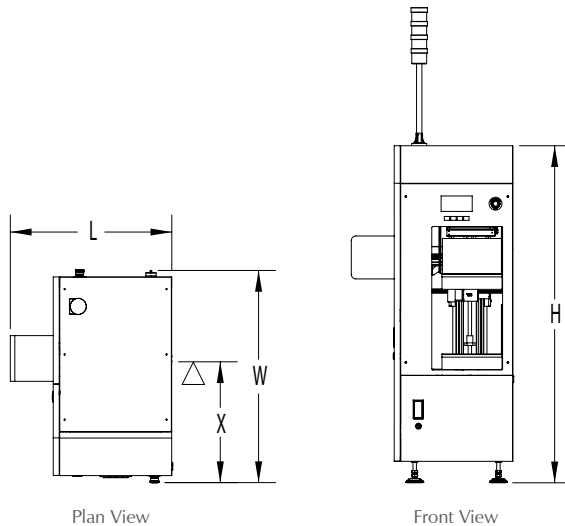

SPECIFICATIONS	
Description	This unit is used for loading of substrates, leadframes or carriers.
Magazine	Specify upon order
No. of Magazines	Depends on magazine type
Loading Time	Average 5 seconds
Magazine Change-over Time	Average 20 seconds
Indexing Pitch	1 - 4 (5mm pitch) or specify
Power Source	100, 230VAC 1Ph
Power Consumption	850VA max.
Air Pressure	4 - 6 bar
Air Consumption	10 ltr/min. max.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM4412LM	753 x 989 x 1571	530 mm	210 kg