

Fluxometer®

Maximizes Yields and Reduces Rework

FLUXOMETER®

Improve Process Quality - Eliminate guesswork when it comes to managing the consistency of flux application during wave soldering. Ordered in the same width as your WaveRIDER® pallet, the Fluxometer® rides the finger conveyor through the fluxing stage, conveniently and accurately rendering proof of a tuned spray fluxer. So easy to use, operators can perform diagnostic checks in minutes.



www.ecd.com/products/fluxometer →



ELECTRONICS



FOOD/BAKING



SOLAR



INDUSTRIAL





Maximize yields and reduce rework by qualifying your spray fluxer pattern uniformity and top-side-penetration.



KITS INCLUDE:

- Fluxometer® Pallet
- Fluxometer Test Mesh
- Test Paper Chart
- Test Paper Assortment
 - IPA Paper
 - Neutral PH Paper
 - Low PH Paper
- Quick Reference Guide


1 year warranty on materials and workmanship



Focused on Quality, Driven by Passion

TEST MESH

Built for a long service life, the Mesh is G10 glass epoxy PTH with uniform hole spacing. Superior alternative to using a production PCB with random hole spacing and diameters

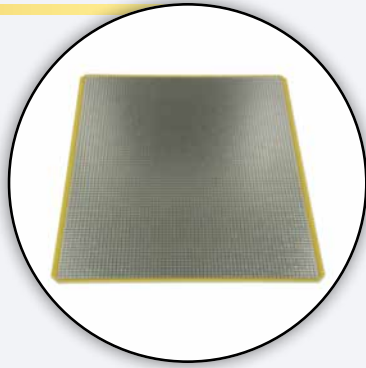

COVER LATCHES

Secures the cover in place to ensure the test paper and mesh are properly seated in the frame support.




TEST PAPER

Special test paper to observe topside board penetration and overall uniformity of flux application.

Kit includes sample pack of 3 paper types. Water-based fluxes use Neutral pH (7 or less) or Low pH (4 or less). IPA test paper is best for alcohol-based fluxes.



TEST PAPER EXAMPLES

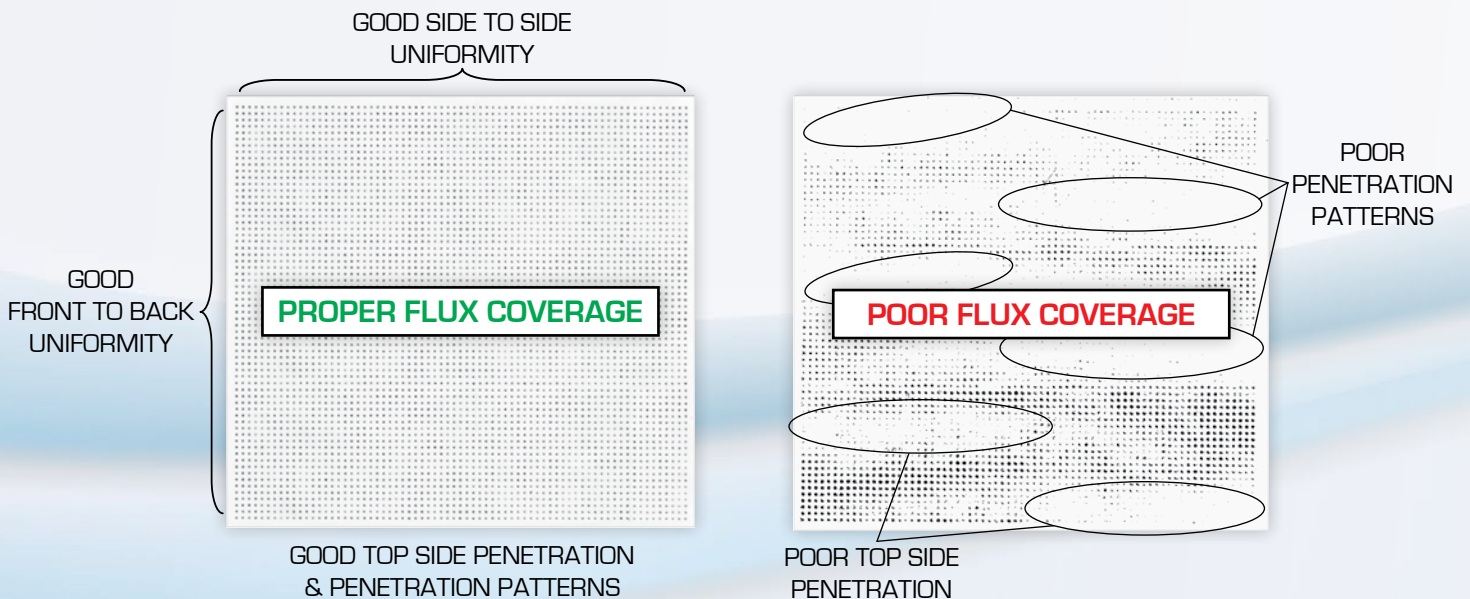

SPECIFICATIONS

PHYSICAL: Fluxometer®

Length: 313 mm [12.32 in.]

Height: 28 mm [1.08 in.]

Thickness, Pallet: 8 mm [0.315 in.]

Width:

- Standard: 229 mm [9"], 305 mm [12"], 381 [15"], 458 mm [18"]
- Custom: Contact ECD

Material: Electrostatic dissipative composite

PHYSICAL: MESH & TEST PAPER

Length, Mesh: 216 mm [8.5 in.]

Thickness, Mesh: 1.59 mm [0.063 in.]

Width, Mesh:

- 9": 181 mm [7.14 in.], 12": 257 mm [10.14 in.], 15": 334 mm [13.14 in.], 18": 410 mm [16.14 in.]
- Custom: Approx 51 mm [2 in.] less than pallet width

Hole Diameter: 0.035 in.(0.889 mm) plated through

Material, Mesh: G10 glass epoxy

Width, Paper:

- 9": 178 mm [7 in.], 12": 254 mm [10 in.], 15": 330 mm [13 in.], 18": 406 mm [16 in.]
- Custom: Approx 51mm [2 in.] less than mesh width

Test Paper Type: IPA, Neutral or Low pH Sensitive

PATENT

U.S. PATENT No. 6,321,591

WARRANTY

1 year parts and labor

WEBSITE

www.ecd.com ➔



ECD North & South America
World Headquarters
4287-B SE International Way
Milwaukie, Oregon 97222-8825 U.S.A.
Tel: +1 503 659 6100/+1 800 323 4548
Fax: +1 503 659 4422
E-Mail: sales@ecd.com | Web: www.ecd.com

ECD Asia/Pacific
Singapore
Mobile: +65 9692 6822
Fax: +65 6241 9890
E-Mail: ecd.asia@ecd.com

ECD Europe/Africa/Middle East
Mobile: +48 512 659 100
E-Mail: ecd.europe@ecd.com

• Top rated customer support • No-cost ECD Online Training • Award winning software •

Accredited Lab



Member of



Awards



Social Networks

