




\* Tower light (optional)

## Features

- ❖ User friendly 'soft touch' LED membrane control panel
- ❖ First In First Out (FIFO), Last In First Out (LIFO) and pass through operating modes
- ❖ Flexible repositioning of 'fingers' (support bars) to accommodate jagged edge PCBs
- ❖ Durable rollers as conveying medium (no replacement of belts needed)
- ❖ **Fast, smooth and precise indexing (frequency inverter controller)**
- ❖ Threshold system provided
- ❖ Smooth and parallel width adjustment (leadscrew)
- ❖ Small machine footprint
- ❖ SMEMA compatible

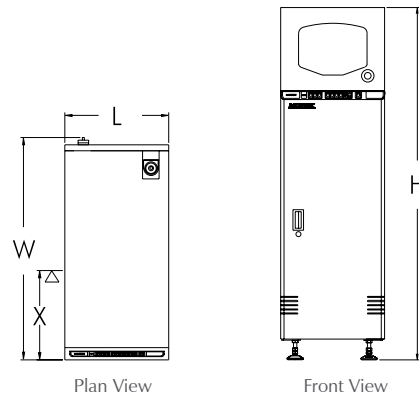

Legend  
 $\Delta$  : Fixed Point

SPECIFICATIONS	
<b>Description</b>	This unit is used as a buffer between SMD machines.
<b>Maximum PCBs Capacity</b>	26 pcs or specify
<b>Maximum Load</b>	2 kg/PCB
<b>Cycle Time</b>	Average 15 seconds
<b>Indexing Pitch</b>	20 mm or specify
<b>Power Source</b>	100, 230VAC 1Ph
<b>Power Consumption</b>	350VA max.
<b>Air Pressure</b>	4 - 6 bar
<b>Air Consumption</b>	2 ltr/min. max.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM1400-M	500 x 980 x 1700	425 mm	210 kg
L	NTM1400-L	653 x 1080 x 1700	425 mm	240 kg