


## Features

- ❖ Applicable to various substrates, leadframes or carriers
- ❖ Applicable to handle magazine of various sizes
- ❖ 'Servo Control' lifting/traversing motion
- ❖ High speed and precise indexing
- ❖ Easy loading or unloading of magazines
- ❖ Stores up to 10 different types of magazine dimensions
- ❖ Operation selectable between magazine or stack
- ❖ User friendly touch screen panel
- ❖ Fast product change-over cycle
- ❖ SMEMA compatible

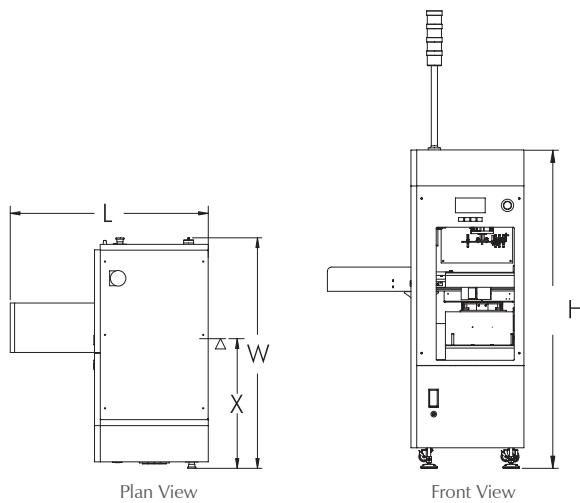

Legend  
 △ : Fixed Point

SPECIFICATIONS	
<b>Description</b>	This unit is used for loading of substrates, leadframes or carriers.
<b>Magazine</b>	Specify upon order
<b>No. of Magazines</b>	Depends on magazine type
<b>Loading Time</b>	Average 8 seconds (excluding interleaf)
<b>Magazine Change-over Time</b>	Average 20 seconds
<b>Indexing Pitch</b>	1 - 4 (5mm pitch) or specify
<b>Power Source</b>	100, 230VAC 1Ph
<b>Power Consumption</b>	1000VA max.
<b>Air Consumption</b>	15 ltr/min.

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM4413LM	955 x 1120 x 1550	660 mm	340 kg